



# Premium Turtle Trap

## ASSEMBLY INSTRUCTIONS

**Step 1:** Attach vinyl floats with 3/8" bolts, large washers and tube bushings as pictured in Figures 1 and 2.

**Step 2:** Notice the hinge and flippers are color coded to match. Attach flippers to hinges on the frame with small stainless screws and nuts.



**Figure 1: Outside Cage**



**Figure 2: Inside Cage**



### Package Contents

- Turtle Trap Frame
- 2 Flippers
- 2 Molded Marine Vinyl Floats

#### Flipper Hardware

- (A) 4 Stainless Steel Screws with Lock Nuts

#### Float Hardware

- (B) 4 Square Tube Bushings
- (C) 4 Galvanized 3/8" Bolts
- (D) 8 Large Flat Washers
- (E) 4 Lock Washers
- (F) 4 Nuts

## SETTING THE TURTLE TRAP

To set the Pond King Floating Turtle Trap, you will need:

- Weight (brick or 1/2 cinder block)
- Stake (rope will be tied to it on the bank)
- 2 Ropes (1 approx. 3' longer than water depth to attach weight to trap; 1 at least 30' for moving trap in and out of water)
- Boat (for larger ponds/lakes)

### For Smaller Ponds:

**Step 1:** Tie one end of the shorter rope to the trap and the other end to the weight.


**Step 2:** Tie one end of the longer rope to the trap.

**Step 3:** Put weight and trap on the bank on one side of the pond. Take longer rope in hand and walk to the other side of the pond. Pull the rope to move the trap and weight into the pond. We recommend having the trap at least 30' from the shoreline.

**Step 4:** Tie the free end of the rope to the stake at the bank.

### For Larger Ponds and Lakes:

Attach the weight to the trap. Using a boat, take weight and trap to where you want the trap to be placed in the pond. (We recommend at least 30' from the shoreline.) Drop the weight and trap into the pond.

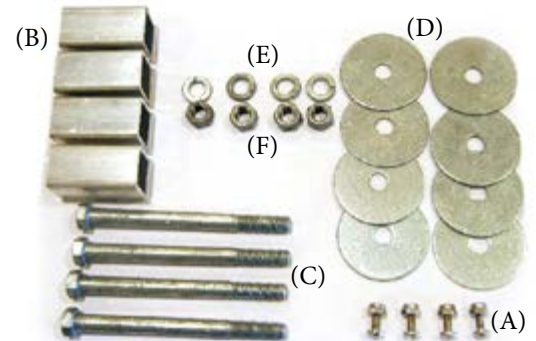

Download our Pond King app for more pond management tips and information!

**FREE IN THE  
APP STORE**



### HELPFUL TIP

Check the trap and remove any turtles about every two weeks. Remove other floating surface debris to increase catch frequency.